



Eaton 93PM 50 kW UPS

Efficient. Scalable. Innovative.

The Eaton® 93PM UPS combines unprecedented efficiency and reliability with an eye-catching design. A space-saving, scalable and flexible device that's as easy to deploy as it is to manage, it's the perfect three-phase white or grey space solution for today's data center.


Lowest TCO (total cost of ownership)

- Conserve valuable data center floor space with the compact footprint, internal battery back-up and optional internal maintenance bypass
- Grow effortlessly with the vertical scalability, reducing cost and unexpected future growth risks
- Reduce power and cooling OPEX through industry-leading energy efficiency
 - 99 percent efficiency with Energy Saver System (ESS)
 - Up to 97 percent efficiency in double-conversion mode

Easy deployment

- Provides flexible configurability, maximizing deployment flexibility

Eaton 93PM efficiency in double-conversion and ESS

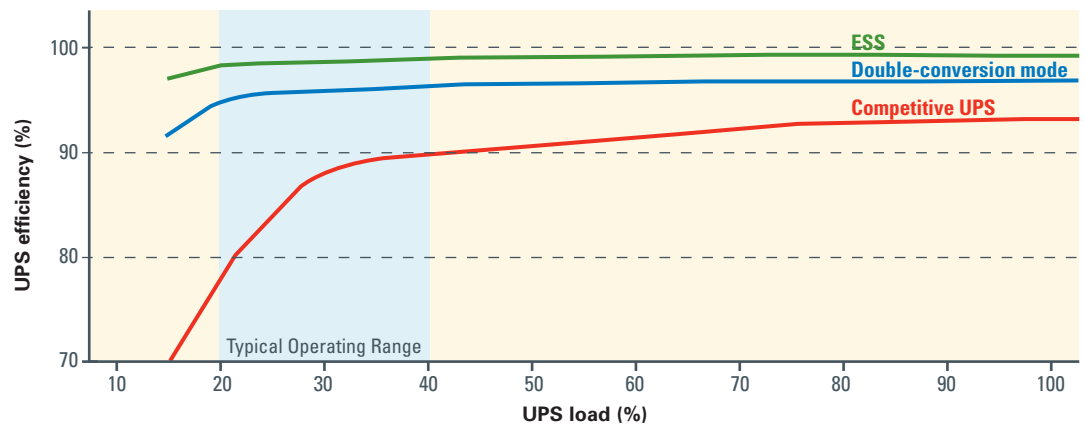


Powering Business Worldwide

The 93PM ESS energy cost savings pay for the UPS in less than 3 years. Calculate your 93PM savings with ESS at Eaton.com/ESS.

The functional core of the 93PM UPS

- A Top cable entry**
Comes with sidecar/maintenance bypass options (sidecar option is required for top cable entry)
- B Communications and connectivity**
 - Built-in device and host USB
 - Five alarm inputs and dedicated EPO
 - Alarm relay output
 - Four communication slots
- C Color touchscreen LCD interface**
- D Serviceable redundant fan assembly**
- E Replaceable power modules**
(50 kW) with independent control and power
- F Soft start controls**
- G Static switch assembly**
(independent power and control)
- H Internal battery strings**
with flexible runtime options
- I Input/output connections**
- J Optional internal rotary maintenance bypass switch**

74"H

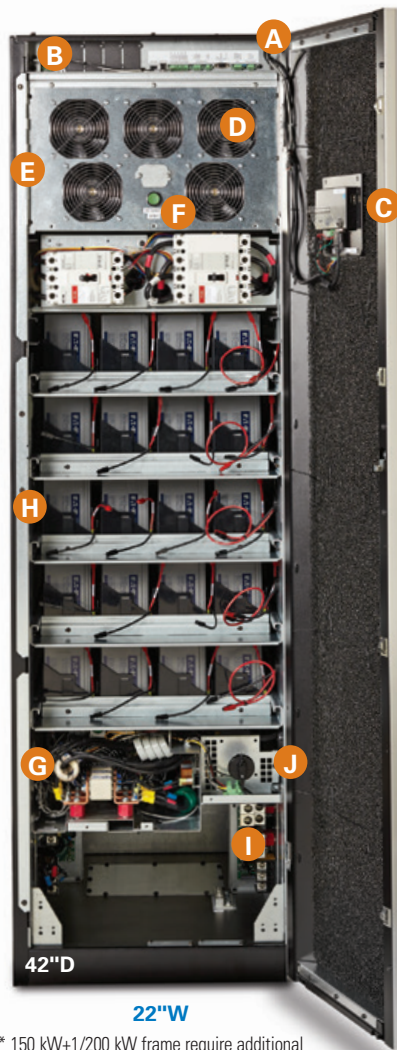

42"D

22"W

* 150 kW+1/200 kW frame require additional 10 inches width for input/output connections.

Open front view of the unit

Front view



- 99% ESS efficiency
- 97% double-conversion efficiency

Eaton 93PM UPS technical specifications*

Power modules for 50 kW frame

Power offering (kW)	20, 30, 40, 50 kW with optional internal N+1 redundancy
---------------------	---

General characteristics

Efficiency in Energy Saver System (ESS)	99%
Efficiency in double-conversion mode	Up to 97%
Parallel capability	4 distributed

Input characteristics

Voltage	480V (208V with IAC-D)
Voltage range	+10% / -15%
Frequency range	50/60 Hz
Power factor	> .99
Input current distortion	< 3% @ 100% load capacity

Battery

Battery voltage	432V
Charging method	ABM® or float technology

Output

Voltage	480V (208V with IAC-D)
Regulation	±1% steady state
Voltage THD	<1% (100% linear load); <5% (non-linear load)
Load power factor range	.8 leading to .8 lagging without de-rating

Certification

Safety	UL1778, cUL
EMC	FCC Part 15 subpart B class A
Surge	IEC 61000-4-5

Optional accessories

- External slim maintenance bypass
- Integrated distribution cabinet (with output transformer options)
- Integrated parallel tie cabinets
- Integrated battery cabinet (small and large)

*Due to continued improvements, specifications are subject to change.

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122 USA
Eaton.com

© 2014 Eaton
All Rights Reserved
Printed in USA
BR153037EN
July 2014



Learn more at:
Eaton.com/93PM

Eaton, ABM, Intelligent Power and Power Xpert are registered trademarks of Eaton.

All other trademarks are property of their respective owners.