


DPI-208/480

3-Phase Microinverters



Yotta's **Dual Power Inverters (DPI-208 and DPI-480)** are native 3-phase microinverters that each support **four high capacity solar modules** and deliver outstanding **performance**. The internals are protected with silicone to **reduce stress** on the electronics, increase its **waterproof** properties, **dissipate heat**, and to provide **maximum system reliability**. Yotta's DPI-208 and DPI-480 are powerful **plug-and-play** MLPE inverters that install faster than any other solution in the market and comply with **rapid shutdown requirements**. Their design improves **thermal dissipation** while maximizing **power production**.

- DPI (Dual Power Inverter) designed to work with PV or Yotta's **SolarLEAF** energy storage technology
- **Native 3-phase power output (208V or 480V)**
- **Low Voltage** DC input (<60V)
- **4 Solar Module Input Channels, 2 MPPT's**
- **Continuous AC output power 1728VA @208V and 1800VA @480V**
- **Engineered** for high-capacity PV modules
- **Maximum** input current 20A
- Integrated **Safety Protection Relay**
- **Rapid Shutdown Compliant**
- **Adjustable Power Factor**

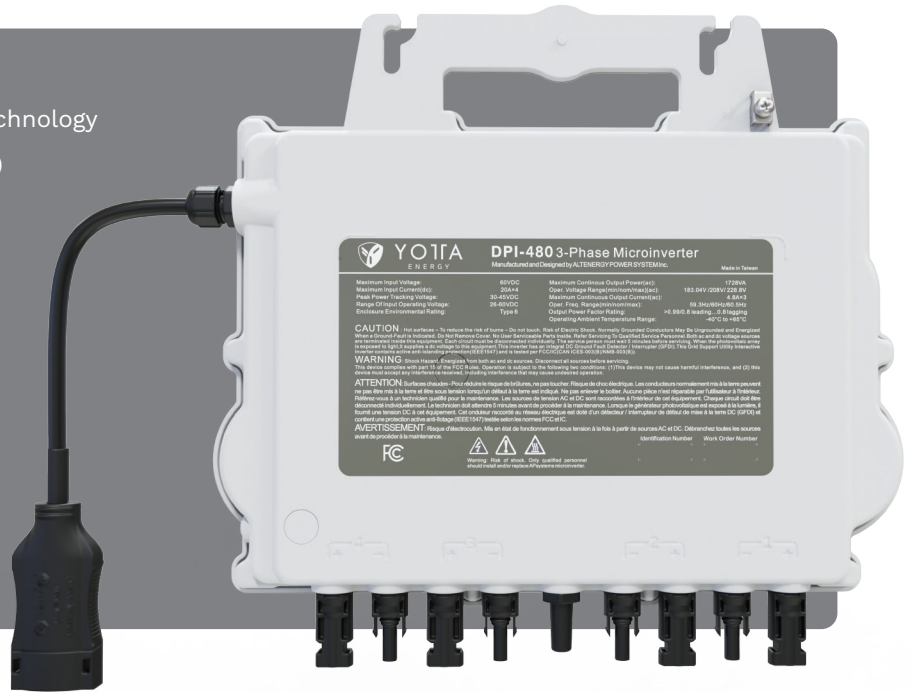

208 OR 480V
OUTPUT VOLTAGE



ADJUSTABLE
POWER FACTOR



YottaVision Monitoring

- **Monitors and Analyzes** each solar module and micro-inverter
- Allows **Remote Access** to the solar array
- Displays **Performance Issues** and alerts the user to events
- **Real Time Communication**
- **Graphs** system solar output over time to boost troubleshooting



Ver. 6.0
April 2024

MODEL

DPI-208

DPI-480

INPUT DATA (DC)

Peak Power Tracking Voltage	32V-45V	
Operating Voltage Range	26V-60V	
Maximum Input Voltage	60V	
Maximum Input Current	20A x 4	
Maximum Input Short Circuit Current	25A per input	

OUTPUT DATA (AC)

Maximum Continuous Output Power	1728VA	1800VA
Nominal Output Voltage/Range ⁽¹⁾	208V/183V-229V	480V/422V-528V
Adjustable Output Voltage Range	166V-240V	385V-552V
Nominal Output Current	4.8Ax3	2.17Ax3
Maximum Output Fault Current (AC) and Duration	L-L:85.4Apk, 13.6ms of duration, 4.967Arms	L-L:35.1Apk, 13.9ms of duration, 2.199Arms
Grid Connections	208V 3-Phase (208Y/120V, 240 Delta)	480V 3-Phase (480Y/277V, 480 Delta)
Nominal Output Frequency/Range ⁽¹⁾	60Hz/59.3Hz-60.5Hz	
Adjustable Output Frequency Range	55Hz-65Hz	
Power Factor	0.99/0.8 leading...0.8 lagging	
Maximum Units per 30A branch ⁽²⁾	5	11
AC Bus Cable	AWG 10	

EFFICIENCY

Peak Efficiency	96.5%
Nominal MPPT Efficiency	99.5%
Night Power Consumption	40mW

MECHANICAL DATA

Operating Ambient Temperature Range ⁽³⁾	-40°F to +149°F(-40°C to +65°C)
Storage Temperature Range	-40°F to +185°F(-40°C to +85°C)
Dimensions (W x H x D)	14" x 9.5" x 1.8" (359mm X 242mm X 46mm)
Weight	13 lbs (6kg)
DC Connector Type	Stäubli MC4 PV-ADBP4-S2&ADSP4-S2
Cooling	Natural Convection - No Fans
Enclosure Environmental Rating	Type 6

FEATURES

Communication (Inverter To ECU) ⁽⁴⁾	Encrypted ZigBee
Isolation Design	High Frequency Transformers, Galvanically Isolated
Energy Management	Yotta EMA (Web and App)
Warranty	10 Years Standard ; 25 Years Optional

CERTIFICATE & COMPLIANCE

Safety, EMC & Grid Compliances



Meets the standard requirements for Distributed Energy Resources (UL-1741) and identified with the CSA Listed Mark

UL-1741; CA Rule 21 (UL 1741 SA and UL 1741 SB); CSA C22.2 No. 107.1-16; HECO RULE 14H AND RULE 22; FCC Part 15; ANSI C63.4; ICES-003; IEEE1547; NEC2014 & NEC2017 Section 690.11 DC Arc-Fault circuit; Protection NEC2014 & NEC2017 & NEC2020 Section 690.12 Rapid Shutdown of PV systems on Building

(1) Nominal voltage/frequency range can be extended beyond nominal if required by the utility.
 (2) Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.
 (3) Inverter may enter low power mode in environments with poor ventilation or limited heat dissipation
 (4) Recommend no more than 80 inverters register to one ECU for stable communication. *